



Smart gate

Table of Contents

Smart gate - controlled by means of mobile devices.....	3
The most important functions.....	3
The Connexoon Access RTS application is compatible with the following devices....	3
Kit components.....	3
Installation of a smart gate system.....	4
Activation of the Connexoon controller.....	5
Downloading the Connexoon Access RTS application to a mobile phone.....	8
Operation of the CONNEXOON ACCESS RTS control device.....	10

Smart gate - controlled by means of mobile devices

The most important functions

- Opening and closing of the garage gate, turning of the alarm, and turning on the lighting immediately before arriving home.
- Automatic closing after parking the car.
- Opening and closing of all the devices owned with a single tap.

The Connexoon Access RTS application is compatible with the following devices



Gate RTS



Garage gate RTS



Connected lock
RTS



Alarm RTS



Lighting RTS



Sockets RTS



Philips Hue
lamp

Kit components



Easy Way 202i automatics



Remote control - 2 channels



Photocells



Connexoon RTS control device

Installation of a smart gate system

1. Install the gate with Easy Way 202i automatics



CAUTION!


Before installing the intelligate gate check whether the remote control devices are programmed correctly. Check also whether the Easy Way 202i gate has been properly adjusted to the gate sliding track.



Before installation, familiarise yourself with the Safety Manual included in the INTELLIGATE automatic gate kit.



2. Connect the control device to the main power supply and the Internet at home

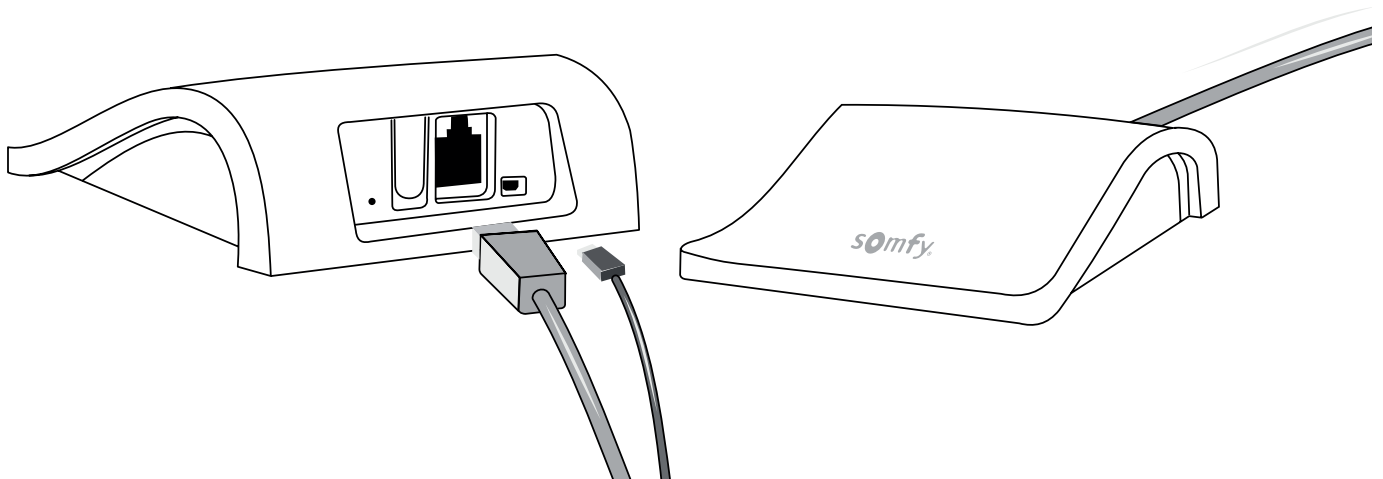

Activation of the Connexoon controller

1. Connect to the somfy-connect.com website



Check whether the Connexoon unit and the device ensuring online access are connected properly by means of an Ethernet cable (green LED status light).



The LED status light indicated the unit status and the operations carried out.

1. Startup



2. Connection status

Problem with online connection

Online connection available

Stage 1

Select your country and language in the “activate the controller” field.

Stage 2

Choose the Connexoon option.

Stage 3

Enter the PIN code of your CONNEXOON controller. The individual code is written on the bottom of the controlling device.

Stage 4

If a selection window appears, choose Connexoon Access RTS

Stages of activation of Connexoon Access RTS

Stage 5

Create your login and password.

Stage 6

Enter your personal data

Stage 7

Check the information provided.

RTS
CONNEXOON
ACCESS

STEP 1
E-mail address and password

STEP 2
Your data

STEP 3
Summary

Summary

Pin code: 1234 5678 9123 4567
Email address: jn.rostani@newquest.fr
Offer: Connexoos
Activation Code: 123456

Please familiarise yourself with the documents below. By checking the box below you accept the terms and conditions included in these documents.
Tafelma will be activated immediately after you accept and confirm your data


☒ Document légale 1 - Lige
☒ Document légale 2 - Lige
☒ Document légale 3 - Lige
☒ Document légale 4 - Lige
☒ Document légale 5 - Lige
☒ TOUT COCHER - I familiarised myself with the documents and accept them

VALIDER ET PAYER →

somfy. Building happiness

Stage 8

Confirm

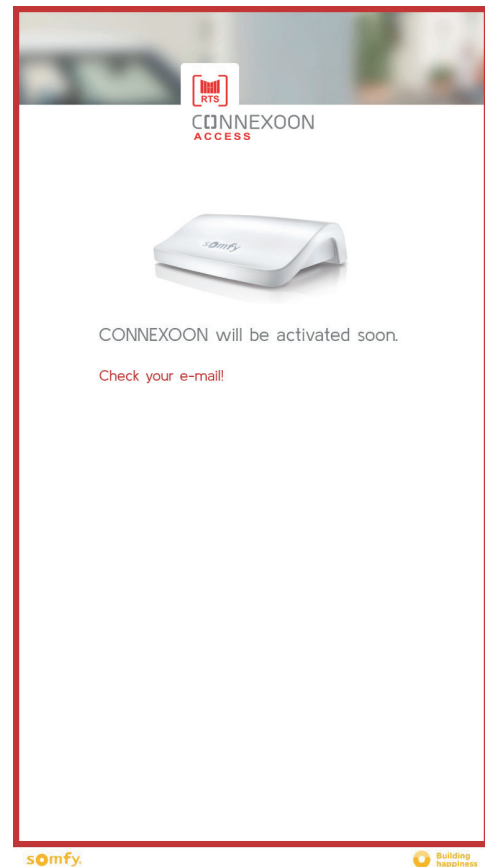


Reception of the confirmation e-mail

Stage 9

You will receive a confirmation e-mail.

CONNEXOON somfy.

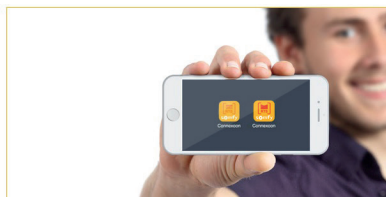

Hello First Name,

this is the last step before completing the activation of the CONNEXOON POLARGOS Access system.



Last step, I confirm my account

CLICK HERE

How to contact us?



Phone number

3260 dtes Somfy (0.15 ct TTC/mn)



E-mail address

service.conso@somfy.com

Please make sure that you have your CONNEXOON PIN handy when you contact Somfy in order to obtain technical support.

This message has been generated automatically. Please do not answer it as we will not be able to read such answer.

Thank you for your trust and welcome to the world of CONNEXOON

Your Somfy team

In order to finish the Connexoos controller activation, click on the "Click here" link.


Congratulations!
CONNEXOON is now
activated and ready
for use.

You have just finished the activation of
CONNEXOON ACCESS RTS POLARGOS

Now you can take full advantage
of your CONNEXOON application
on your mobile device




Downloading the Connexoon Access RTS application to a mobile phone

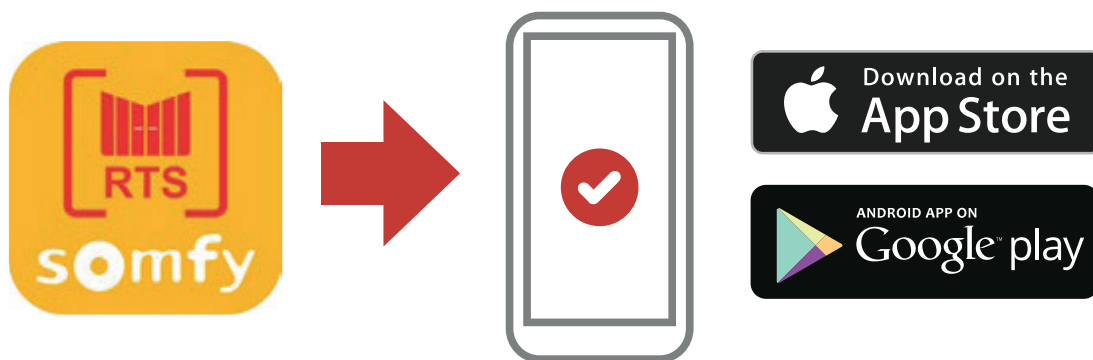



Download the Connexoon Access RTS application available for IOS and Android systems to your mobile phone.

Connexoon Access RTS : 1.1.1.1 (7474)



CONNEXOON
ACCESS

 Email


 Password


[Forgotten password ?](#)

[Create an account](#)

☐ Remember my password

☐ Keep me logged in

 **connect**


demo **somfy.** 

Enter your e-mail address and password specified during activation of the Connexoon controller (see **page 5-6, Activation screen**).


Welcome to the Connexoon **ACCESS** application.

Through it, control all your io-homecontrol® garage door openers, gate openers, exterior lights and more.


Please, fill below your user name which will be used in the dashboard. If necessary, you will be able to modify it, at any time in MY ACCOUNT menu.

 User name

Fill manually the location of your home, or press on the target button, to have access to the mode 'Come back home':


Latitude **47.8590** Longitude **3.2992** 

validate


Specify your identifier. An identifier makes it possible to check which activities have been performed by means of a mobile phone. The identifier can be changed at any moment in the "parameters" menu  available in the history.

After downloading the Connexoon Access application to the mobile phone, it is necessary to accept the statement in line with the following guidance:


1. It is necessary to accept the statement

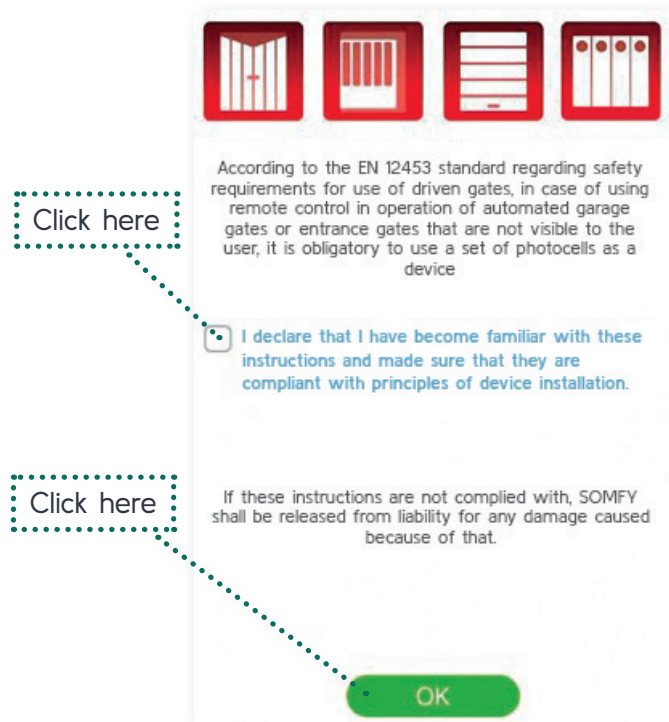


2. Click on the question mark

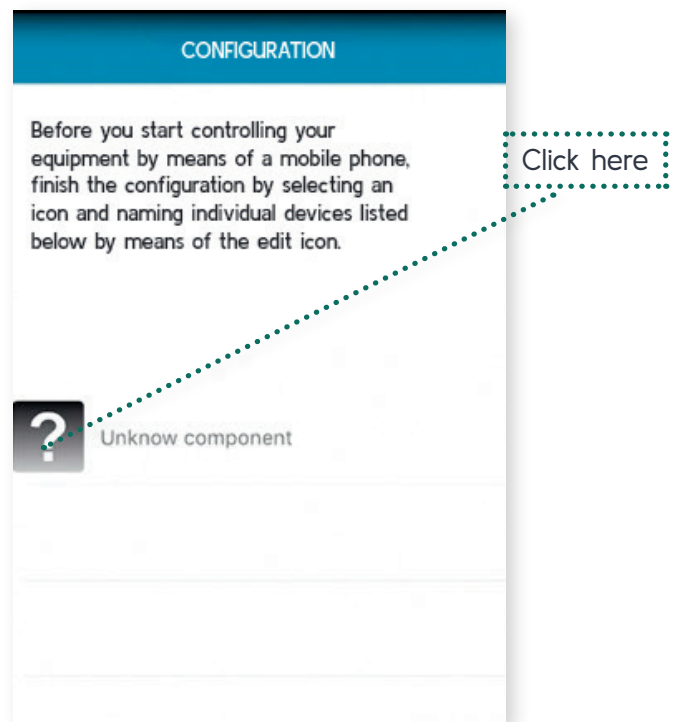


3. Click the TEST button in order to check the correctness of the connection between the device and the gate. Then click on NEXT.

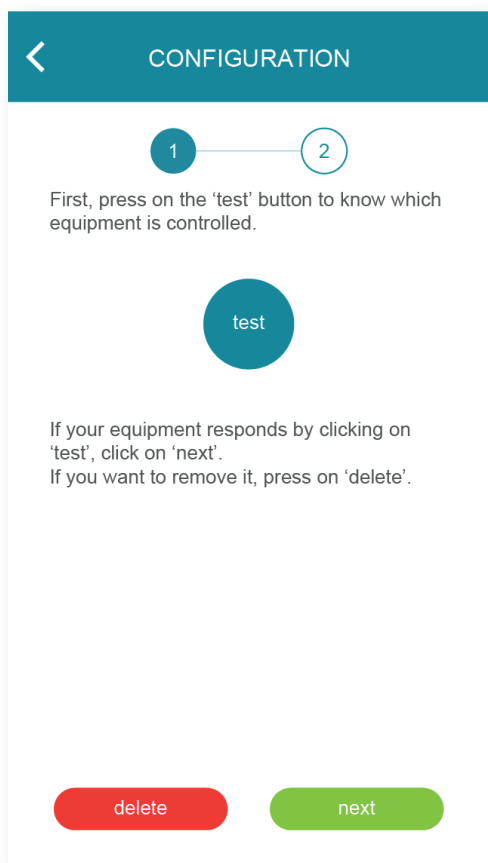

4. Select SGS 201/400/501/601 S.C. 5

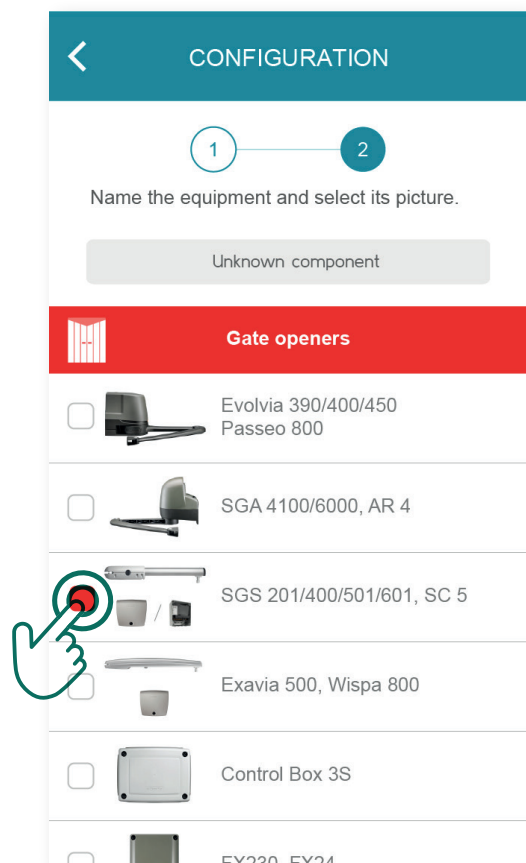


5. Change the name from “Unknown component” to you own, e.g. Intelligate

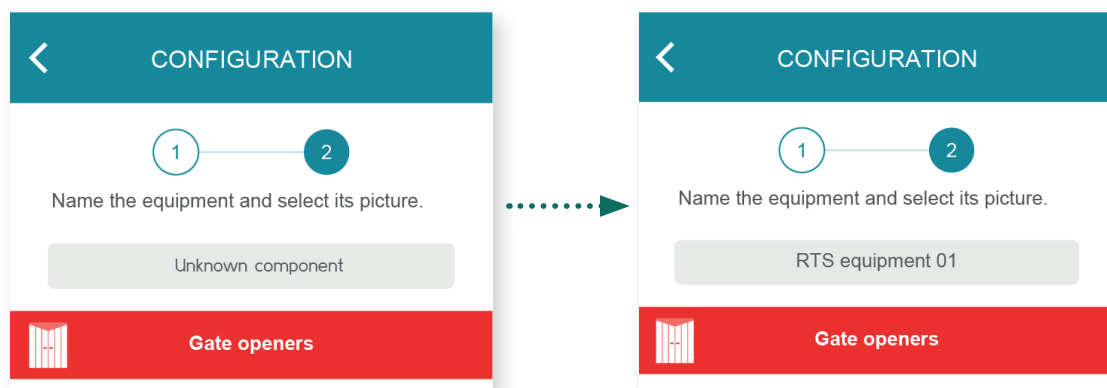


6. Click on SAVE.

Operation of the CONNEXOON ACCESS RTS control device

1. Interface

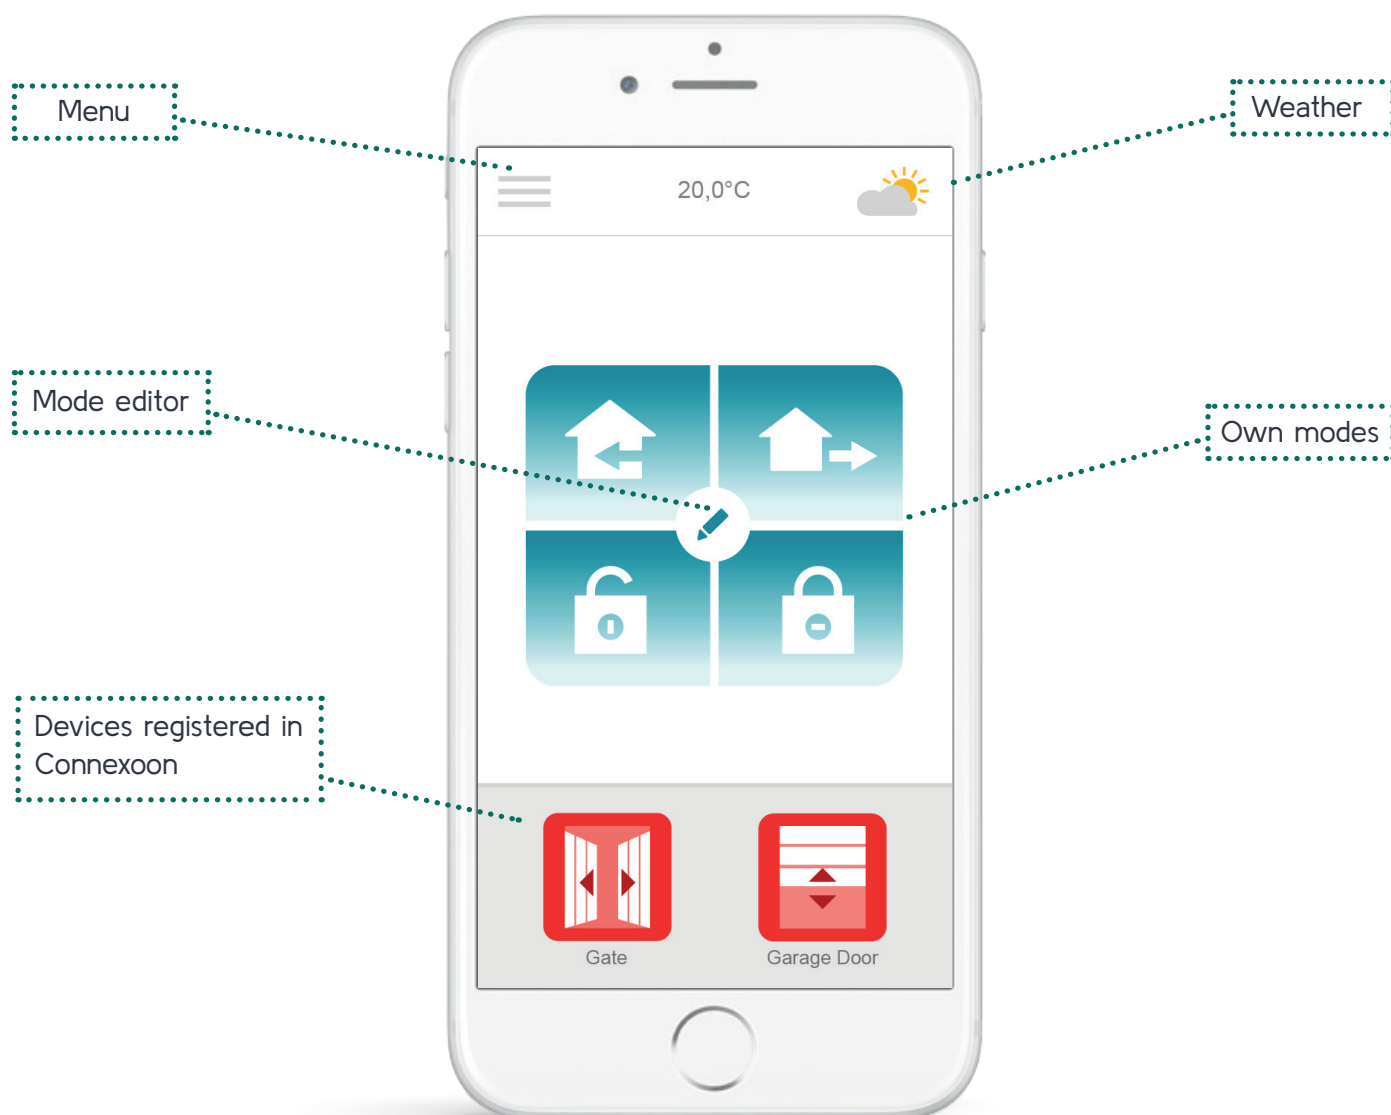

2. Device control

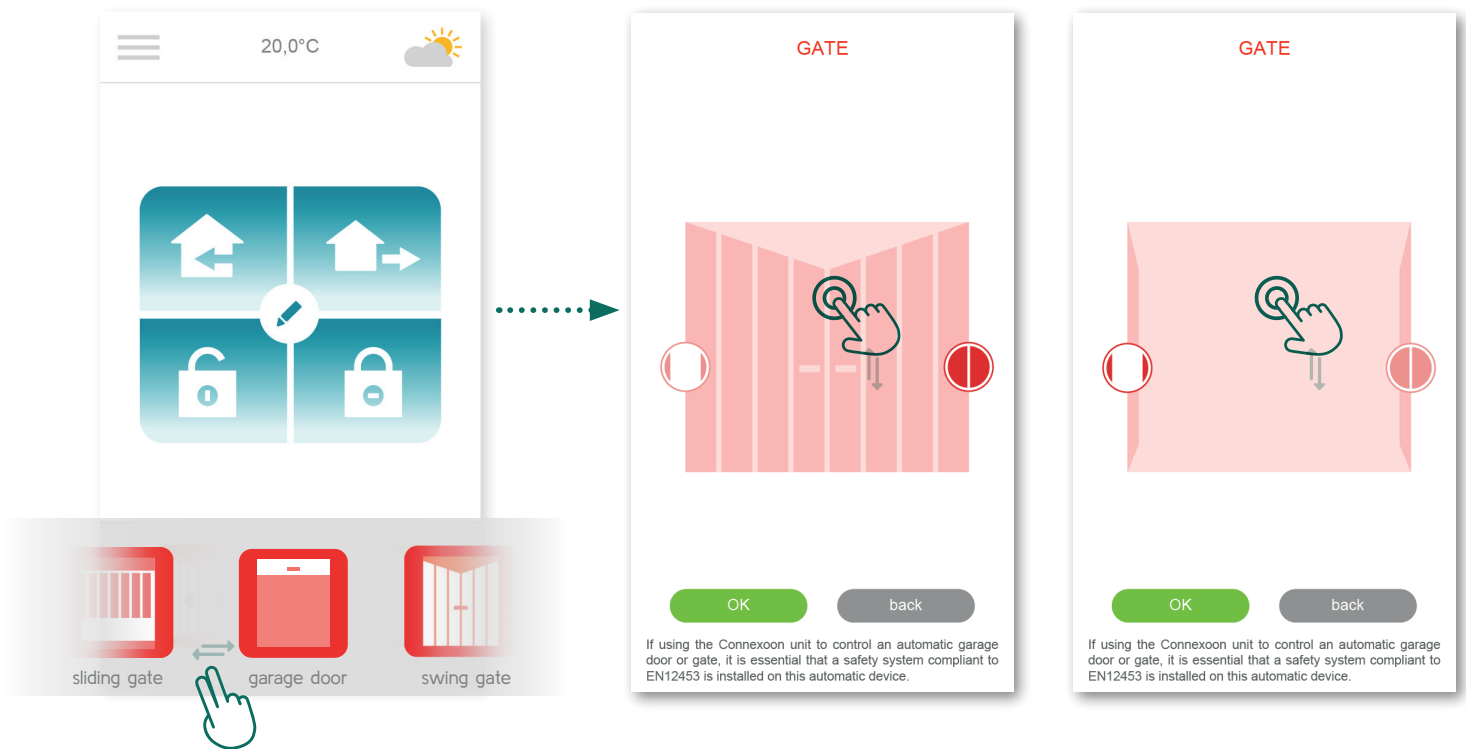

It is possible to control a gate, garage gate, lighting, etc. in the gray frame located at the bottom of the interface.

Tap the icon of the device that you want to control by moving the list to the right or left (example: garage gate).

Tap the icon and choose the gate position: open/close, and then tap

OK

3. Modes

Connexoon Access RTS offers **4 modes**:
“Returning”, “Leaving”,
“Open all”, “Close all”.

Each of these modes can be adjusted to one's own needs by selecting actions to be carried out: gate opening or closing, lighting activation or deactivation, garage gate opening or closing.

Later the modes can be called by means of a single button tap!


E.g. When I am returning, one tap of the button results in the gate opening, external lighting turning on, and garage opening.



Open all/Close all




When returning or leaving it is possible to close or open the gate and/or garage gate and activate or deactivate external lighting.

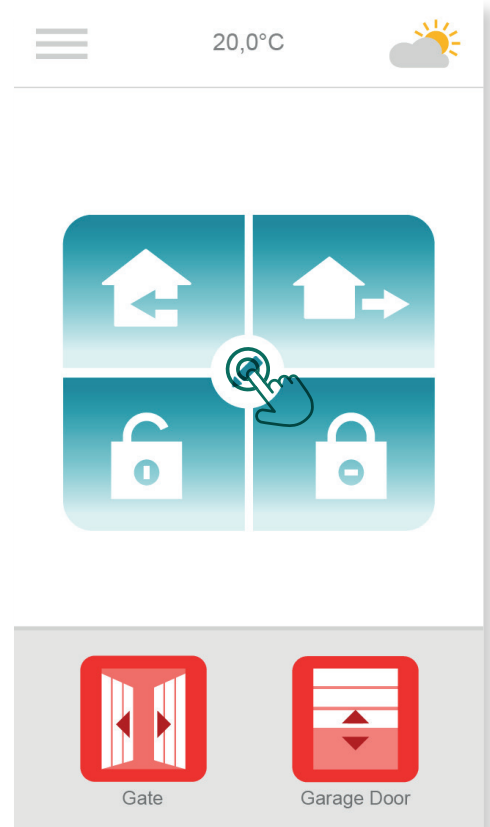

Press  to customise your “Open all/Close all” mode.

Then press  on the  icon to customise the Open all mode or press  on the  icon to customise the Close all mode.

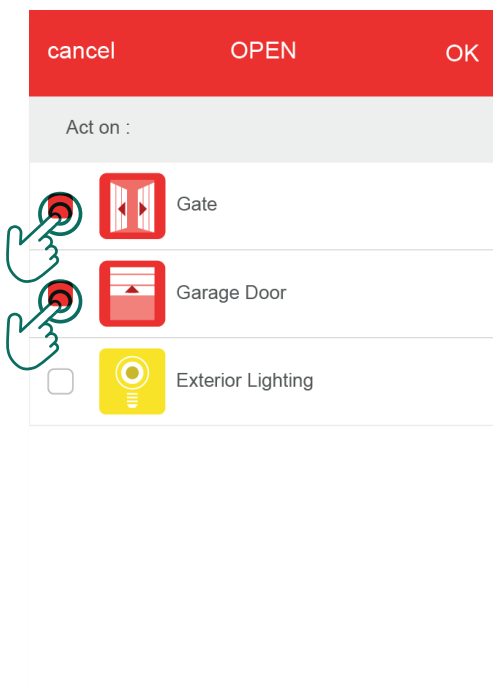


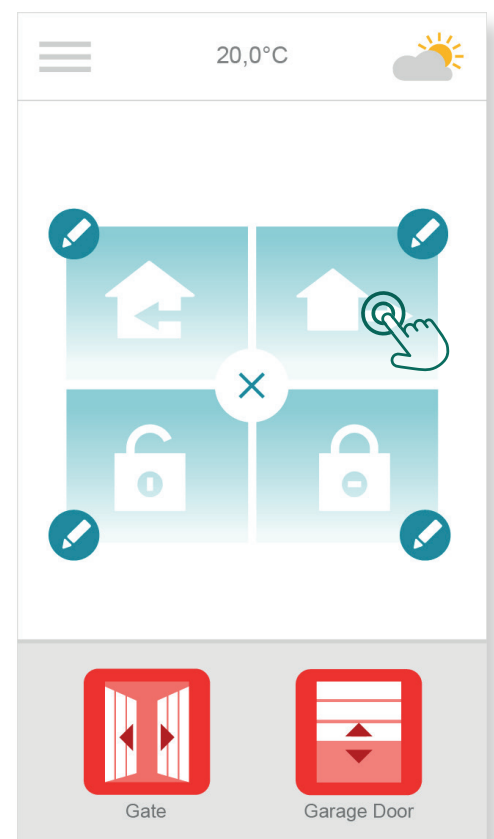
Select the devices you want to activate and then press OK to confirm.

Leaving



When leaving home, you will open the gate by tapping a button once, and the gate will close automatically after the time you specified.


Press  on the  icon to customise the “leaving” mode.



Mark the devices for which actions are to be performed when leaving.

Specify the duration for which you want to perform actions for devices.

Mark the devices for which actions are to be performed a few minutes after leaving.

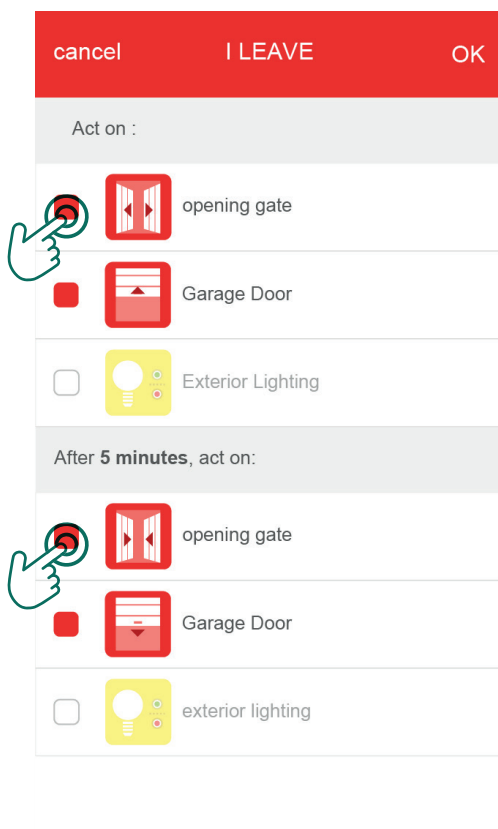


Returning



Thanks to geolocation, your home welcomes you when you return.
Specify in what distance from home the automatic devices specified should turn on.

E.g. When leaving work I activate the "Returning" mode. Geolocation is active and my home welcomes me in the way I specified.

Press  on the  icon to customise the "Returning" mode.

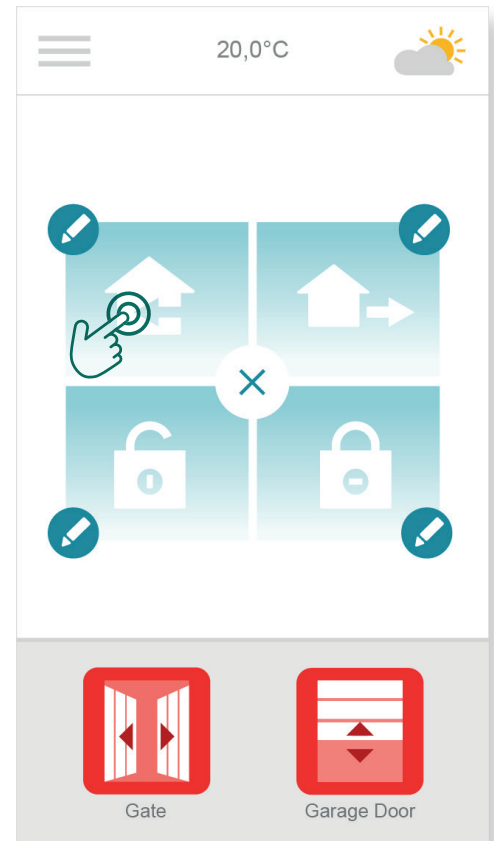


Specify the distance from which you want to activate the "Returning" mode and turn geolocation on or off.


Mark the devices for which actions are to be performed before returning.


Specify the time of return drive: the mode activates after returning.

Mark the devices for which actions are to be performed after returning.

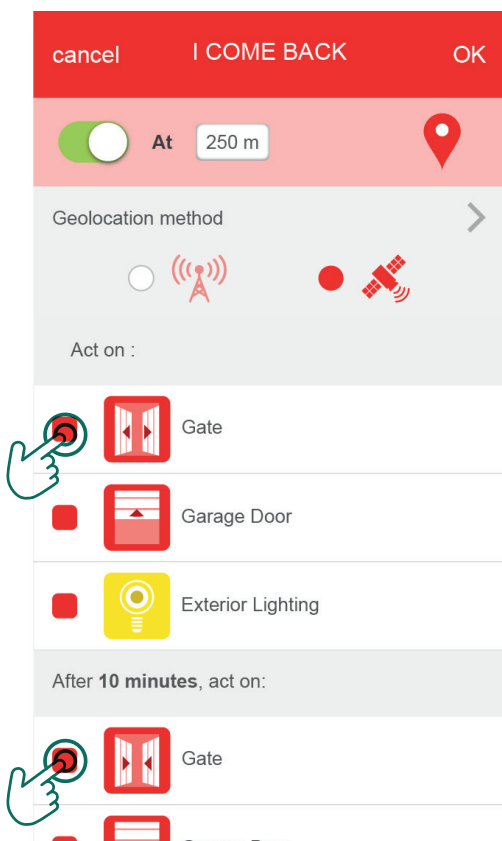

4. Installation management

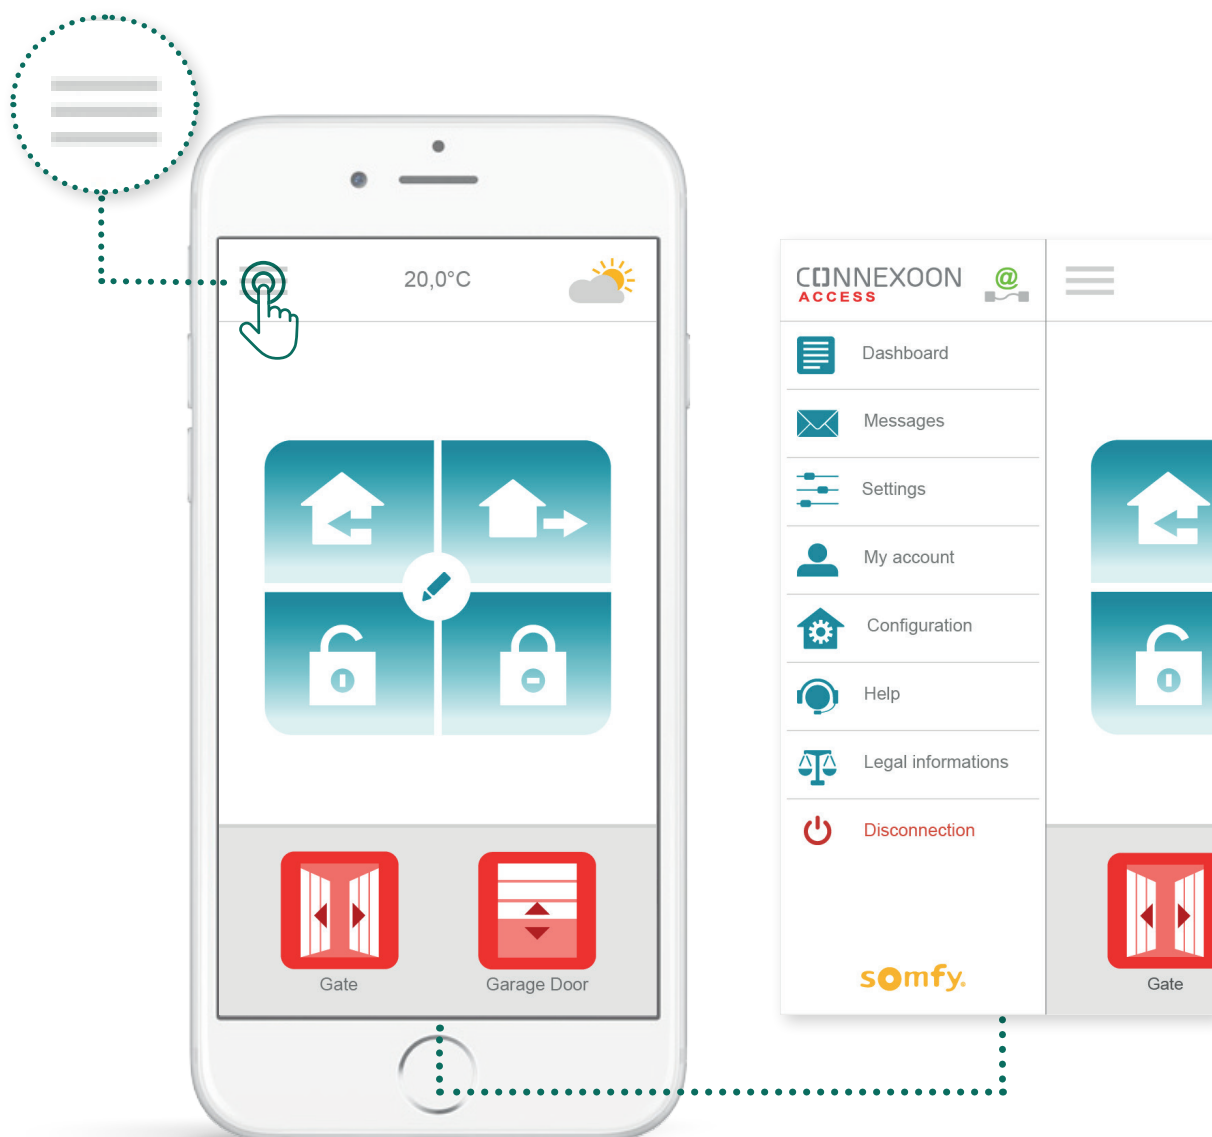


You can press  to access a number of functions that you use to make settings and manage your Connexoon Access RTS application:

- the dashboard,
- your messaging service,
- parameters,
- your account,
- the help system,
- disconnection from the application.


The “Configuration” menu is used to access the advanced installation functions. ([see section 5](#)).

Dashboard

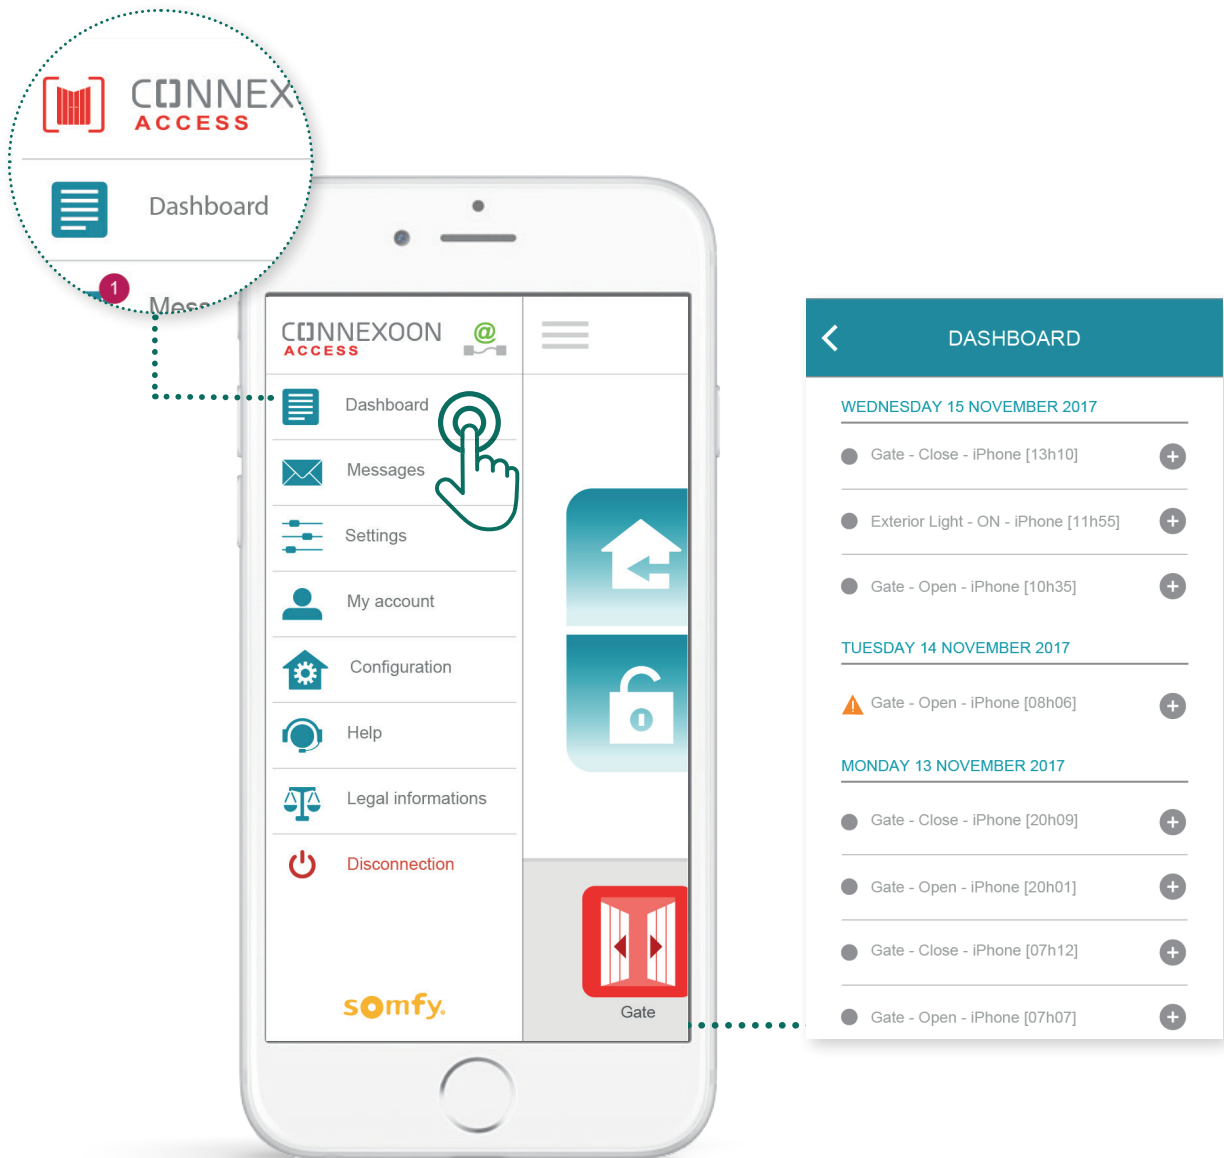


Just press on this menu to open a history of all your connected devices.

- A **green dot** in front of a command indicates that the action was completed correctly.
- A **red dot** indicates that the action was interrupted deliberately.
- An **orange triangle** indicates that a problem occurred.


Press the  icon for more information.

Messages

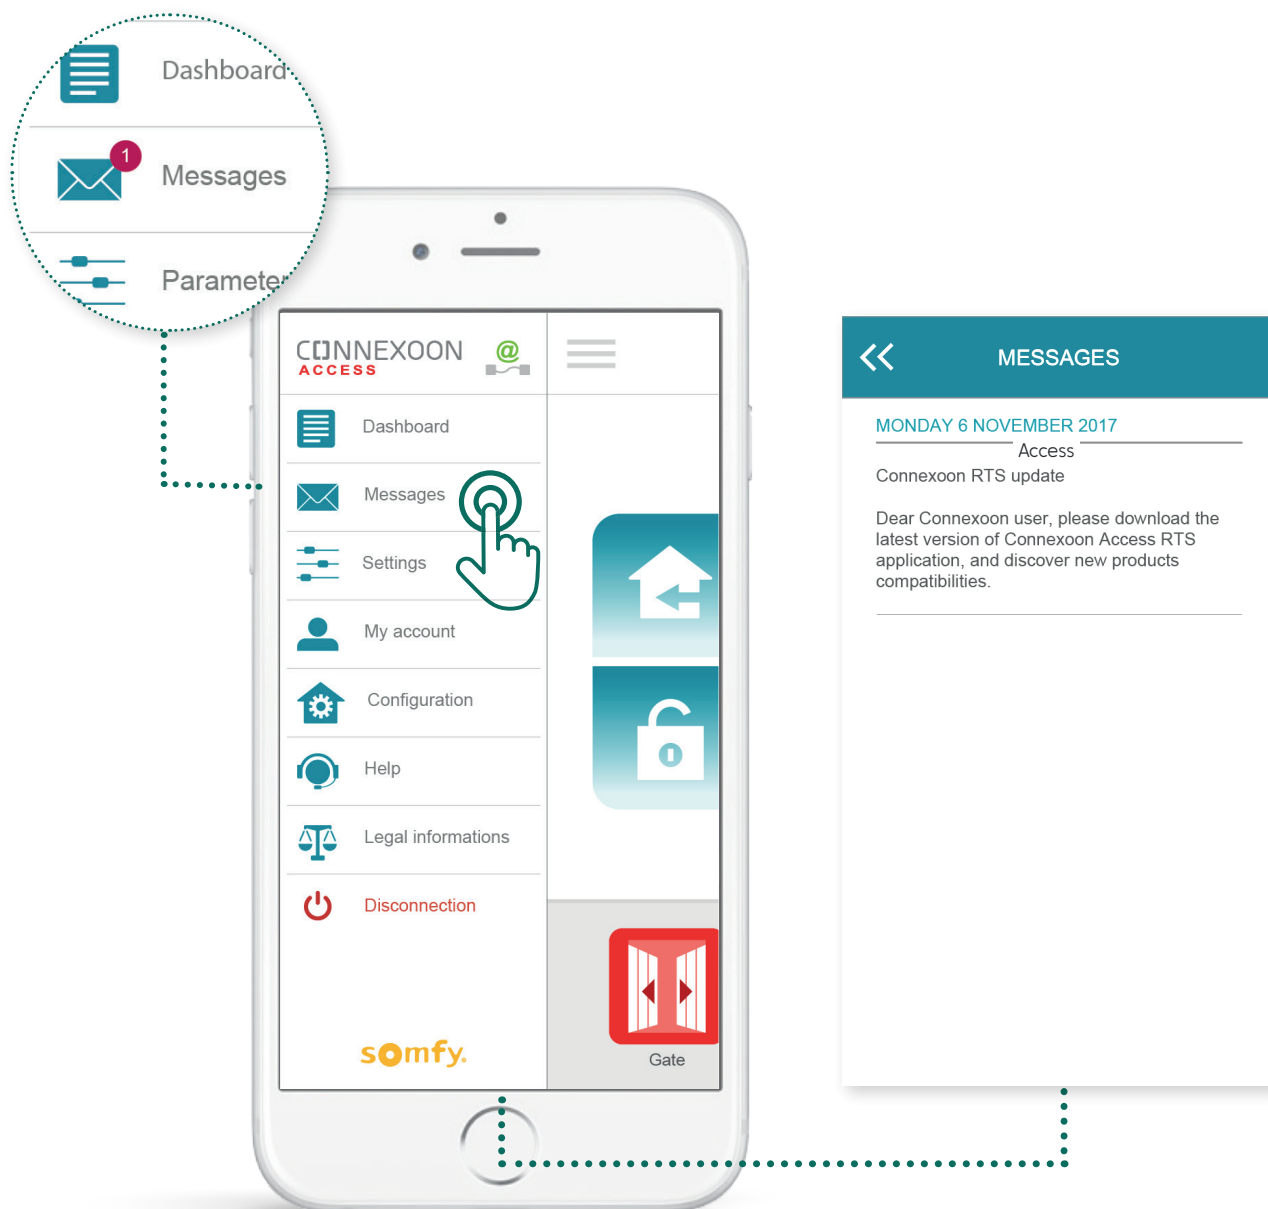


The Connexoon messages include all the information regarding updates and future novelties.

Parameters

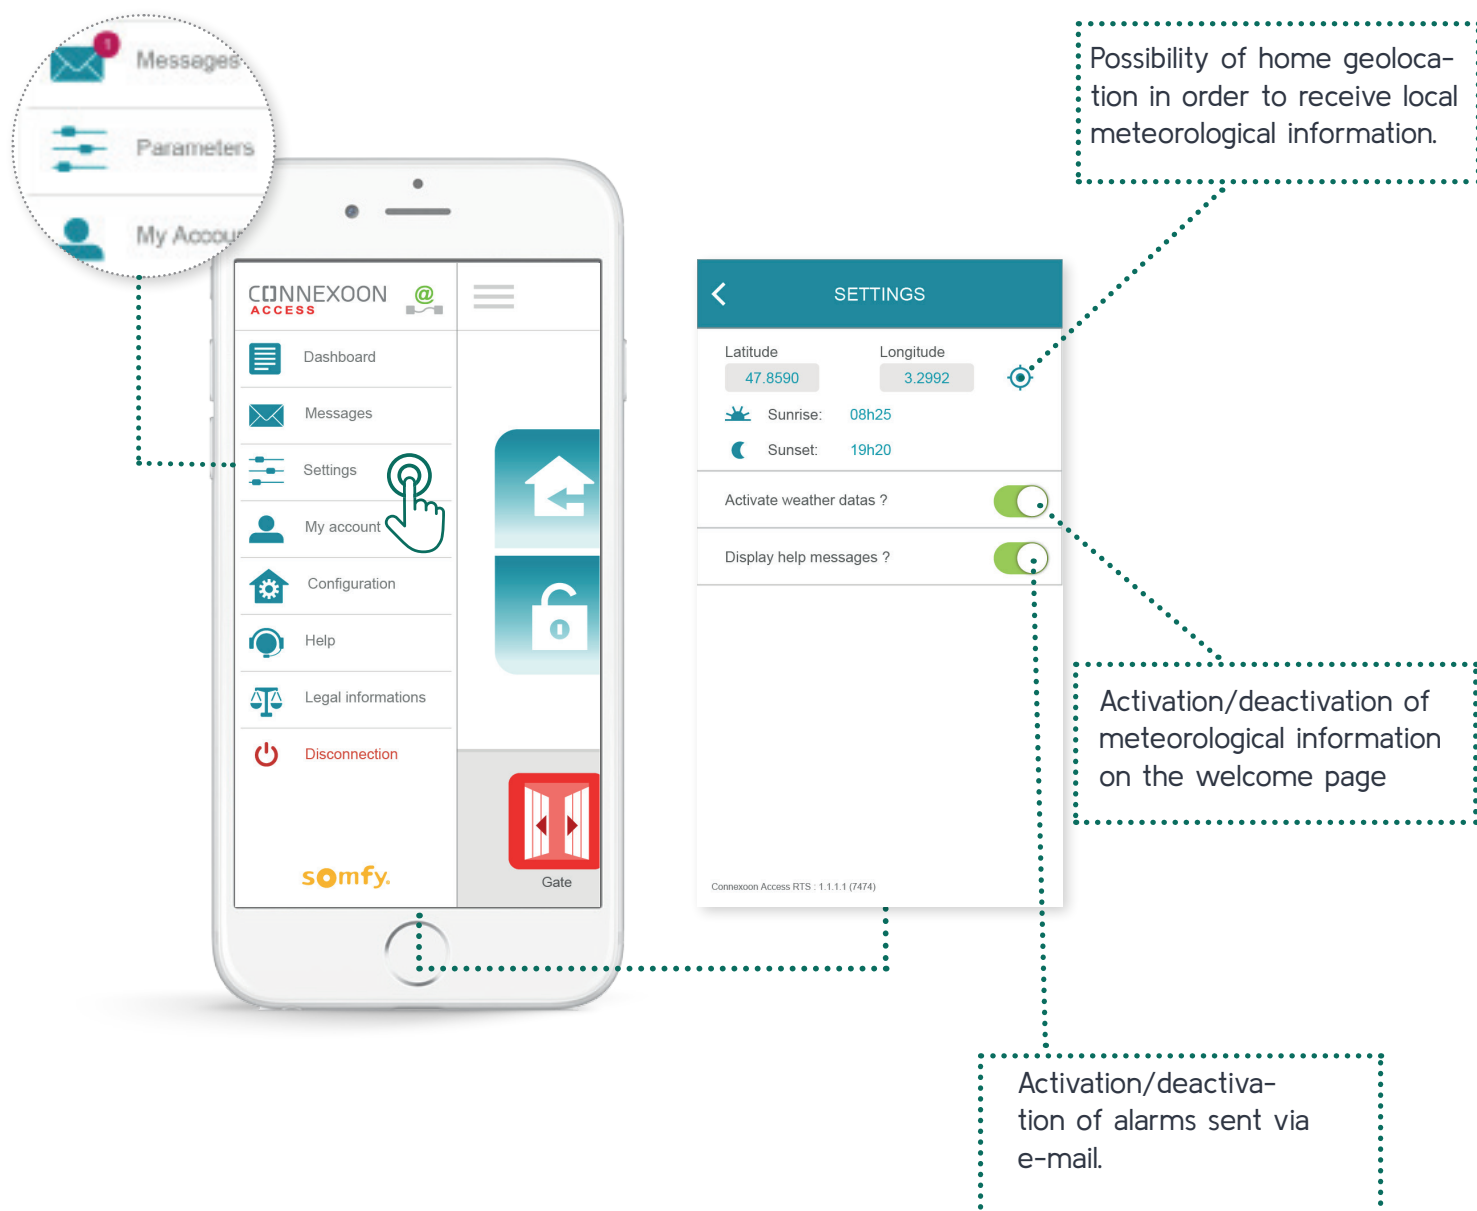


In this menu it is possible to turn on displaying weather data, turn on alarms sent via e-mail, and/or turn on “push” notifications. Here it is also possible to display widgets for a mobile phone and/or Apple watch and to specify one's identifier in order to **adjust history to one's own needs**.

My account

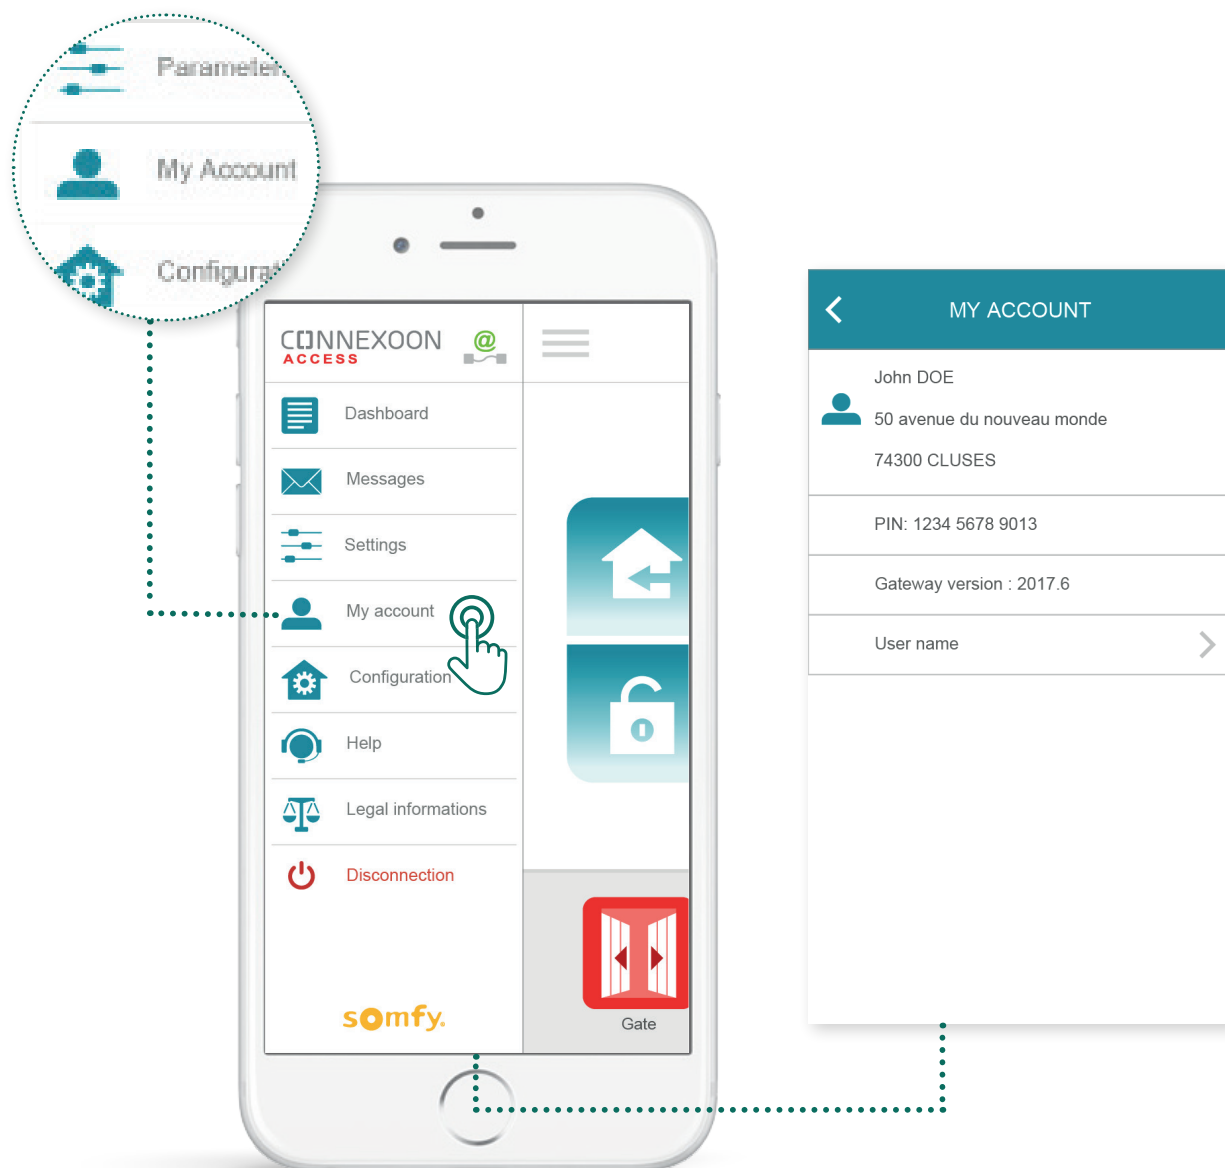

This page includes information provided during activation of Connexoon.

Help

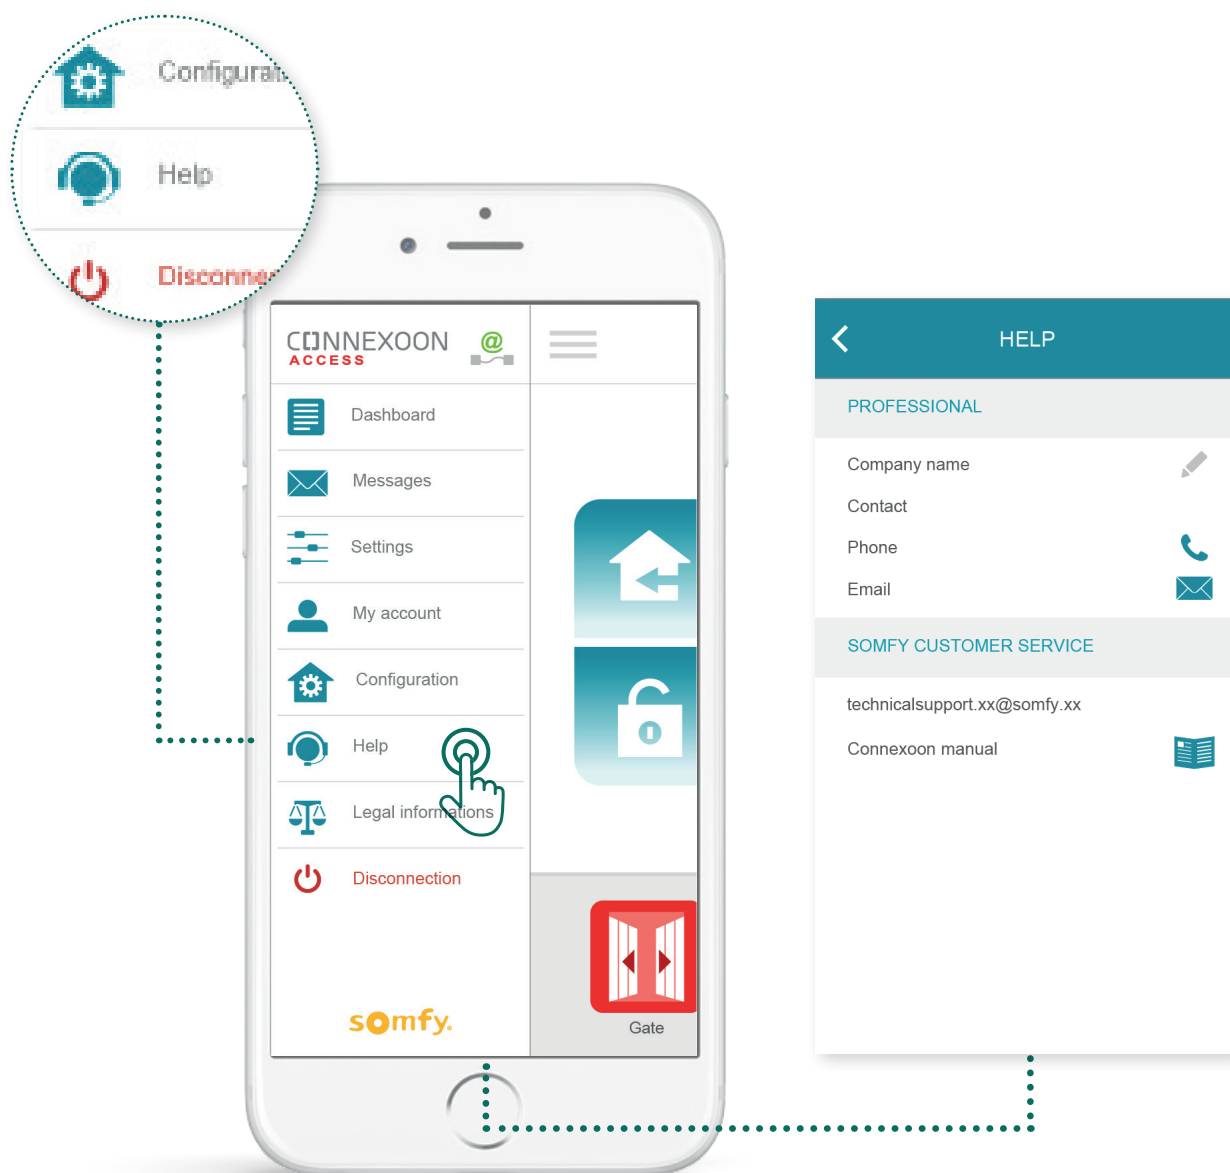


This page may be filled in by you or the fitter in order to enable direct contact with the fitter in case of any questions.

Stay in touch with the fitter by entering their contact data in the application. You can contact the fitter later with a single button tap.

A single button tap is also all you need to obtain the telephone number of Somfy customer service department.

5. Advanced installation functions

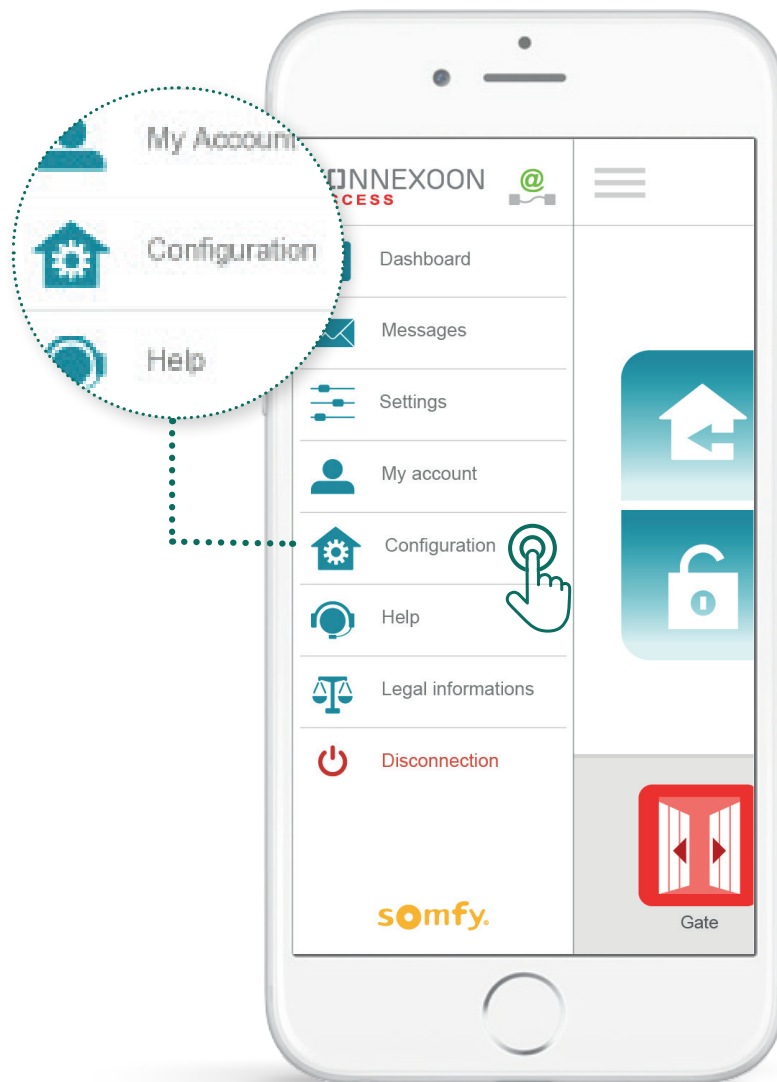

In this menu, you can:

- Store new devices that are compatible with your Connexoon
- Remove/rename devices
- Manage the installation's security key


To access these functions, press .


Changing product names in the application






Press menu 

Tap the “Configuration” tab button

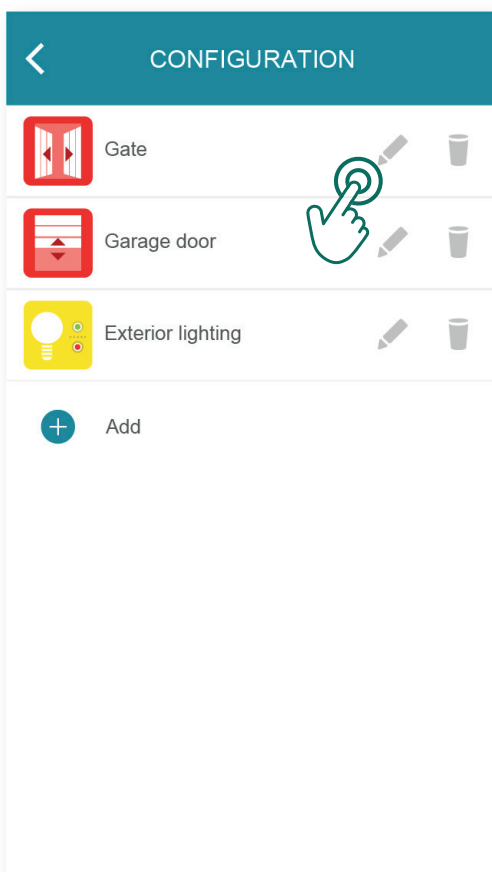

Press on the pencil  to the right of the equipment to change its name

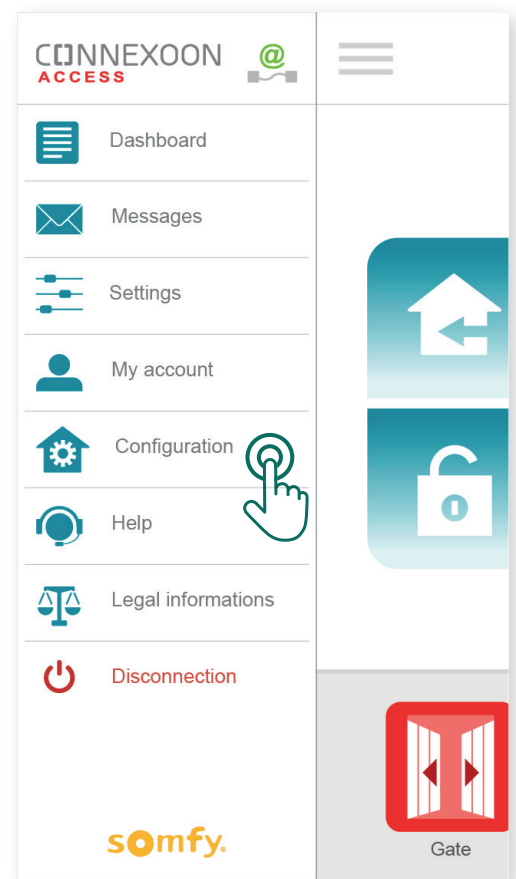

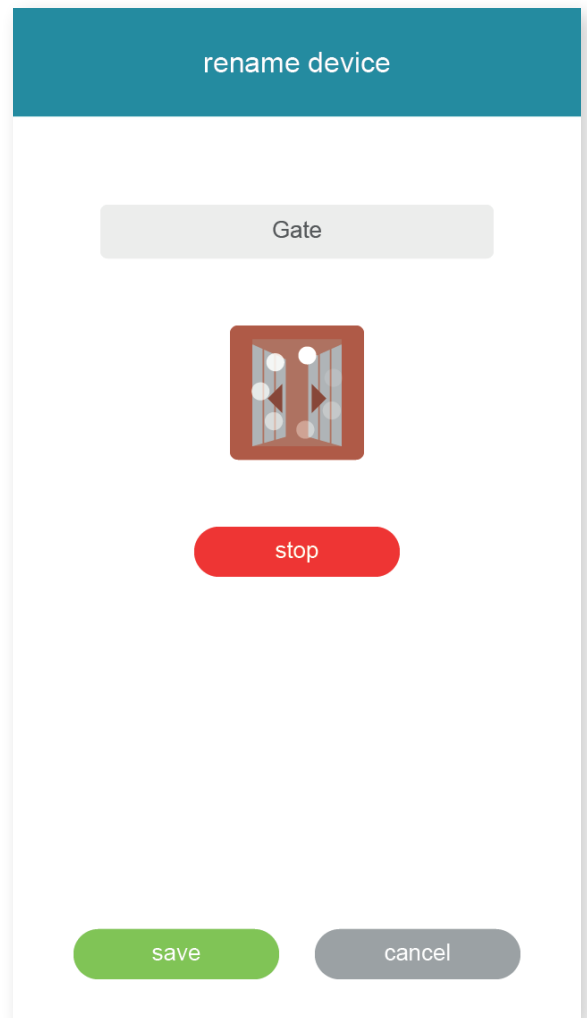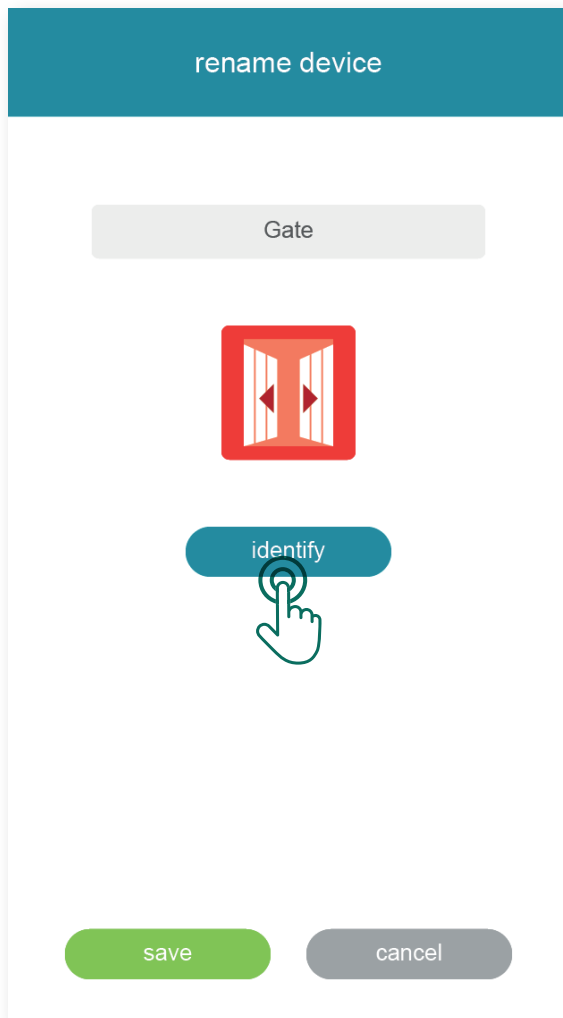


You can change the name of your products by tapping the name filed in the grey box at the top of the screen.

In order to check whether it is the right product, tap the **"Identify"** button. The device will move in one direction and back, or flash.

In order to stop identification, tap the **"stop"** button.


Tap the **"Save"** button to save the new name.

Registering RTS devices in the CONNEXOON unit

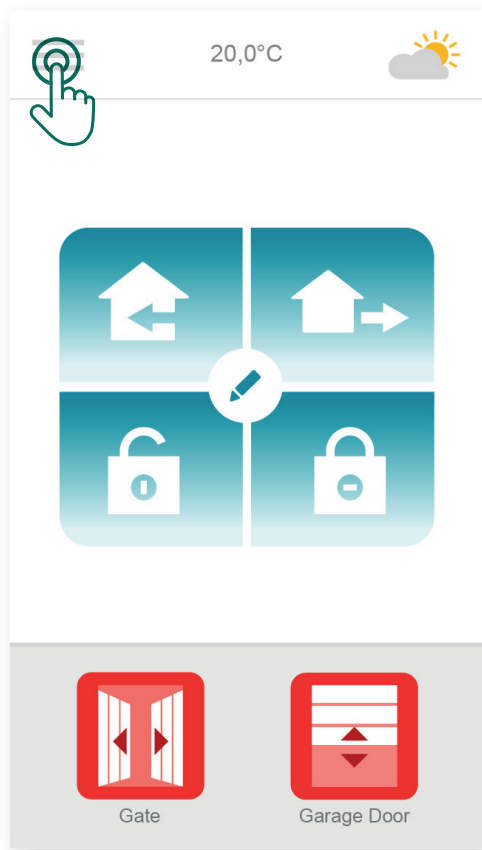



Tap the menu icon 

Tap the “Configuration” tab button

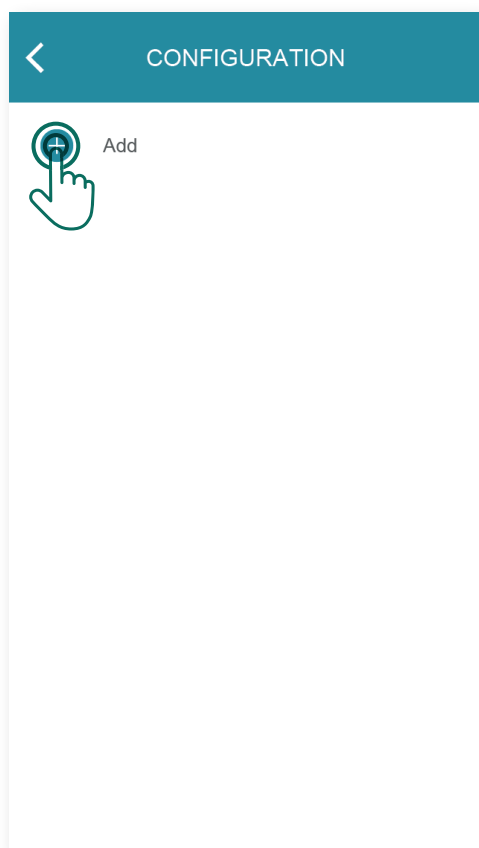




Press 

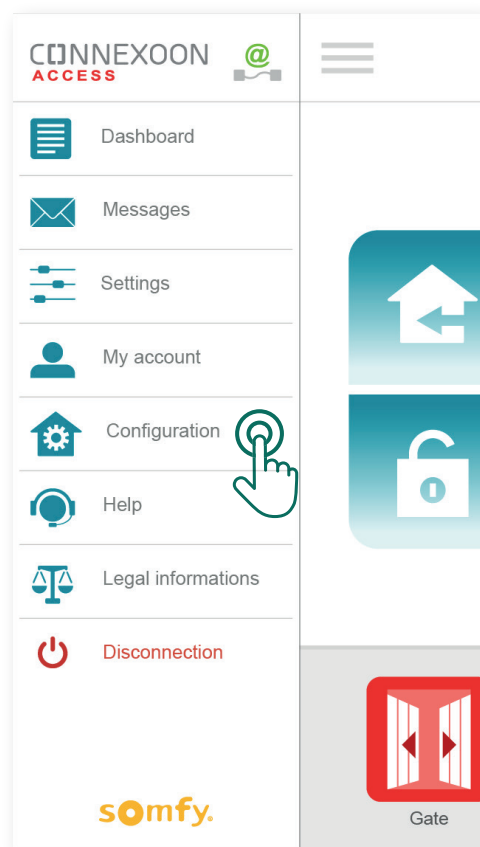

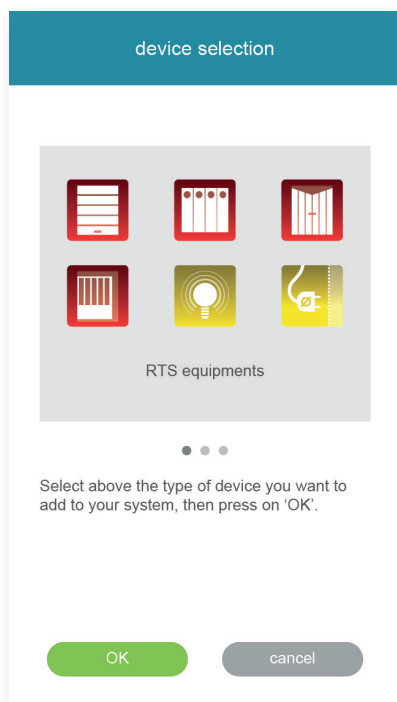


Select the type of product that you want to add to the installation: RTS drives/actuators or Philips Hue lights, and then confirm this by tapping the **OK** button


Select the icon presenting the product that you want to register in the unit.

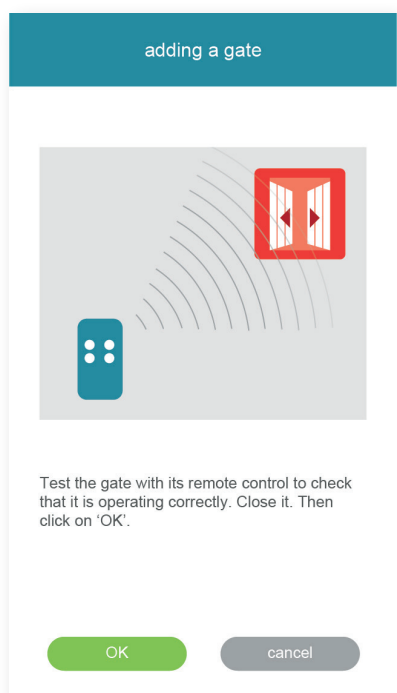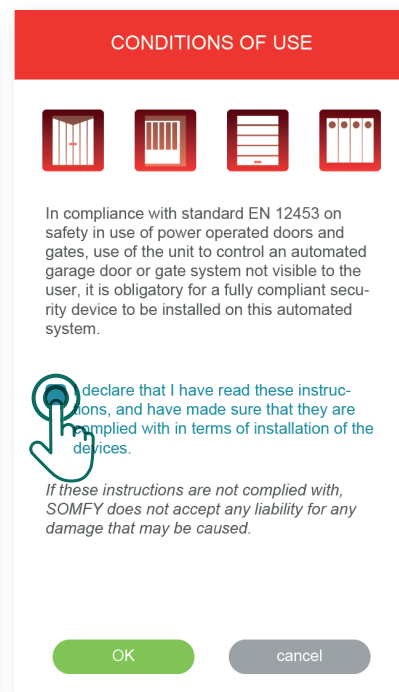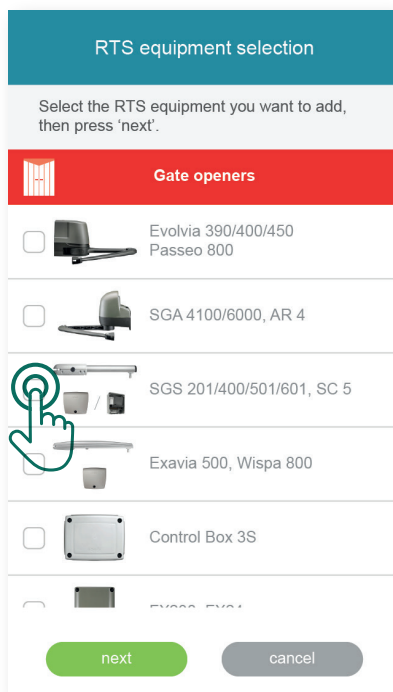

Check the product by changing its position using a wall controller or a remote controller. Make sure that the control element causes activation of the added product only.

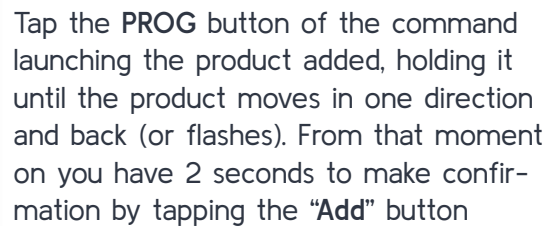


adding a gate



Test its connection by clicking the 'test' button below : the gate should open during 5 seconds.


test



adding a gate


- > If your gate has opened, click on '**OK**'.
- > If your gate has not moved, click on '**restart**' to repeat the procedure.
- > If your gate has still not moved after several attempts, click on '**abort**'. If you have problems, you can also refer to the manual of the gate motor.

OK restart abort

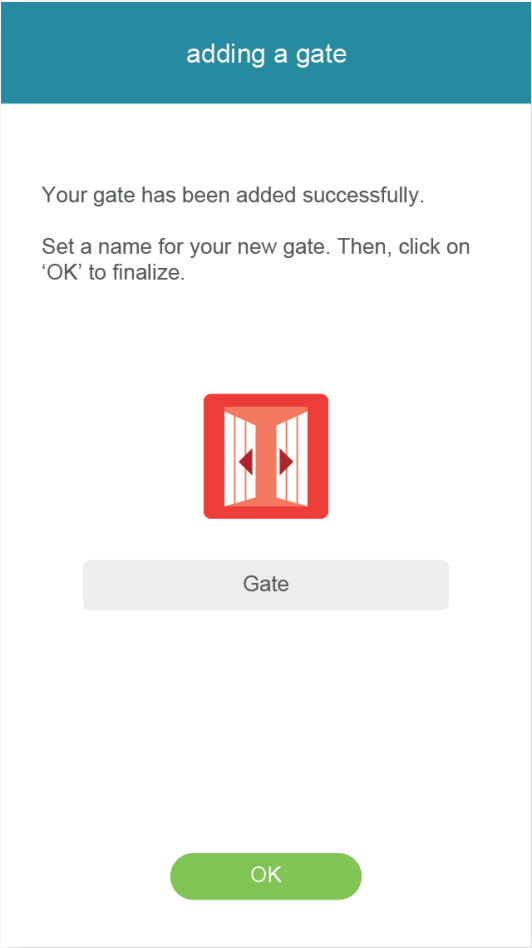


Name the product and then tap OK

The product will then appear on the list.


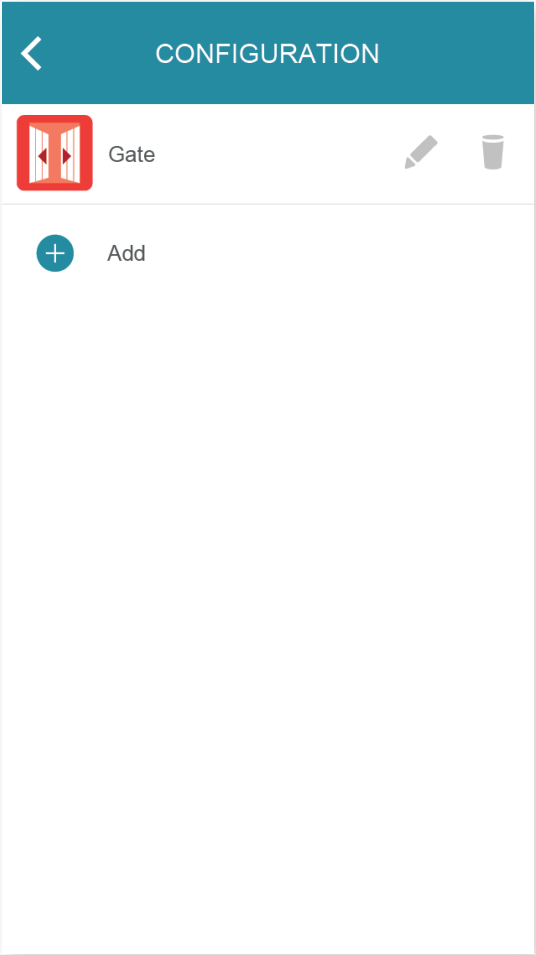


Removal of RTS products in the application

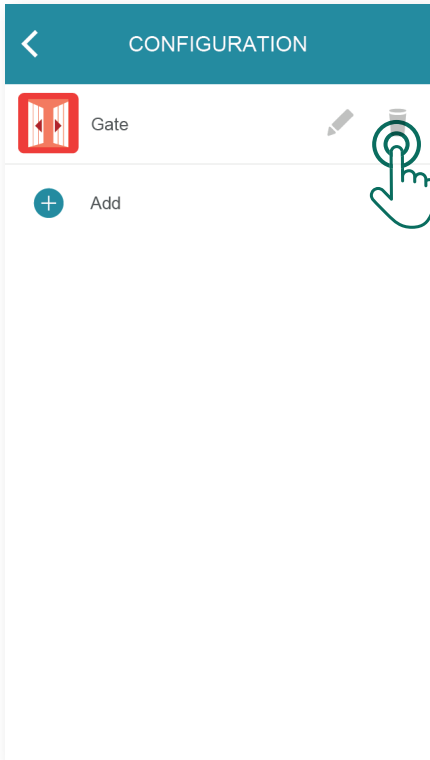


Tap the  button.

Check the product by controlling it using a wall controller or a remote controller. Make sure that the control element activates the removed product only.

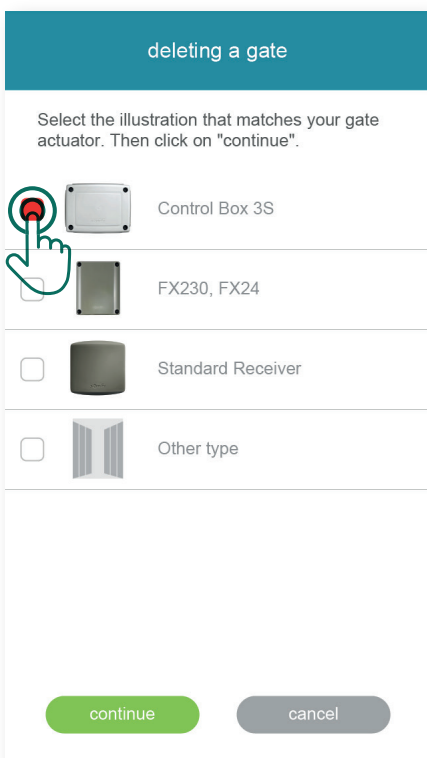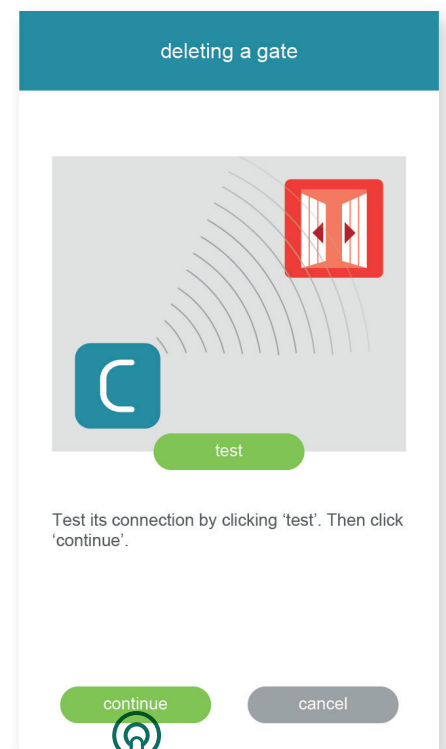




Tap the **PROG** button of the command launching the product removed and hold it for about 3 seconds, until the product moves in one direction and back (or flashes).

From that moment on you have 2 seconds to make confirmation by tapping the **"Delete"** button.

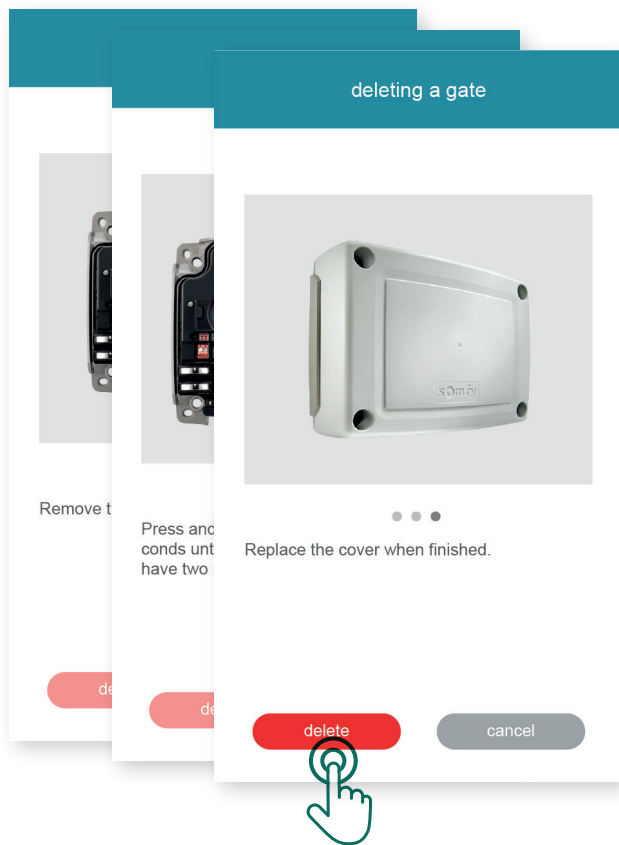

Check whether the product has been removed properly by tapping the “Test” button. If the product has been removed properly, it will not answer.

Tap the OK button if the product did not move or tap “Start again” if it was closed.

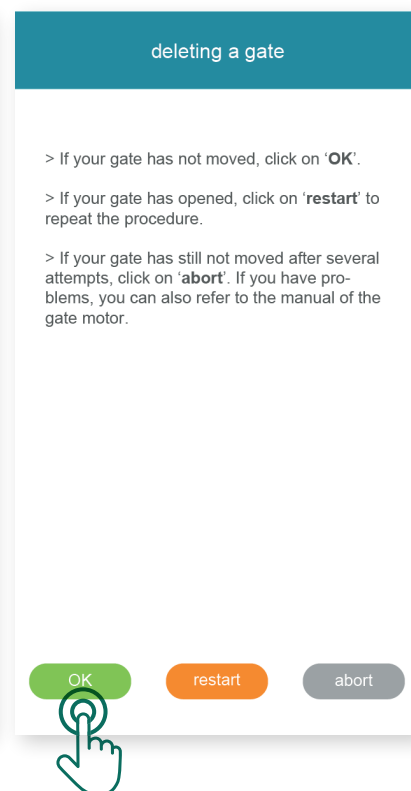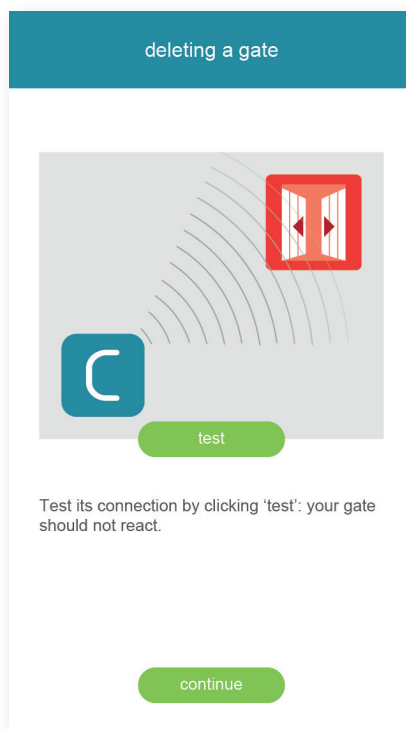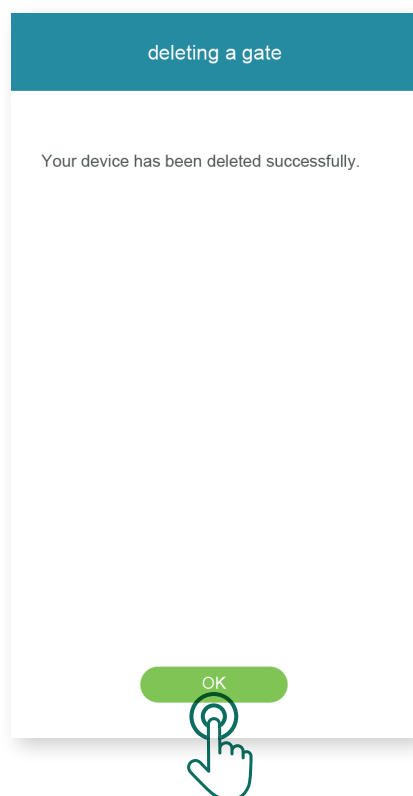

Tap OK to finish the procedure.



PROG

SELECT

LAN

USB



The SELECT button enables the channel to be selected (6 available channels)

The PROG button enables your motorised Somfy products to be registered in your Connexoon RTS unit, without an internet connection

Manual included in the connexoon box

prog-prog devices to the Internet (connection enabling communication between the Connexoon controller and devices).

The USB port enables the Connexoon unit to be supplied via a power cable.

The LAN socket enables the Connexoon unit to be connected to the internet unit via an ethernet cable.



The Easy Way 202i drive and the connexoon control device are factory paired - installation is not required



The LED status light indicated the unit status and the operations carried out.

1. Startup

2. Connection status

