

2023 SEASON



VERMONT ELEMENT SPECIFICATIONS

SELF-ASSEMBLY FENCE



WWW.POLARGOS.PL

VERMONT ELEMENT

SELF-ASSEMBLY FENCE



CE



STEEL



5
YEAR
WARRANTY



RAL 7016
ANTHRACITE



80 x 20 mm



ANTI-CORROSION
PROTECTION



POWERED
OPTION

TABLE OF CONTENTS

FENCE PANEL	3
UNIVERSAL WALK-GATE	4
DOUBLE-LEAF GATE	5
SLIDING GATE	7

SYSTEM ELEMENT: NEAT FIT ALWAYS GOOD



BUY
IN-STORE
OR ONLINE



TRANSPORT IN
CONVINIENT
PACKAGES



ASSEMBLE
WITH
HOUSEHOLD
TOOLS



BY YOURSELF
OR WITH AN
ASSEMBLY TEAM





YOU GET A SOLID
FENCE WITHOUT
WELDS

FENCE PANELS

FENCE PANEL 120 CM



Product width:	199 cm
Clear width of steel posts:	202 cm
Clear width of concrete posts*:	202 cm
Height:	120 cm
Rail profile:	80x20 mm
Number of rails:	10 pcs.
Frame profile:	40x30 mm
Manufacturer's index:	W10457



Package: 201 x 26,5 x 13,5 cm

FENCE PANEL 145 CM

Product width:	199 cm
Clear width of steel posts:	202 cm
Clear width of concrete posts*:	202 cm
Height:	145 cm
Rail profile:	80x20 mm
Number of rails:	12 pcs.
Frame profile:	40x30 mm
Manufacturer's index:	W10456



Package: 201 x 32 x 13,5 cm

ACCESSORIES



Fence panel post
7x7x215 cm
RAL 7016 anthracite

W7284



Fence panel
L connector, 4 pc.
RAL 7016 anthracite


S9591

WALK GATES



WALK GATE WITH HANDLE


Product width:	90 cm
Clear width of steel posts:	98 cm
Clear width of concrete posts*:	100 cm
Height:	150 cm
Rail profile:	80x20 mm
Number of rails:	12 pcs.
Frame profile:	40x30, 40x40, 25x25 mm
Manufacturer's index:	W11049



Package: 174 x 24 x 13,5 cm

WALK GATE WITH ELECTRIC STRIKE

Product width:	90 cm
Clear width of steel posts:	100 cm
Clear width of concrete posts*:	102 cm
Height:	150 cm
Rail profile:	80x20 mm
Number of rails:	12 pcs.
Frame profile:	40x30, 40x40, 25x25 mm
Manufacturer's index:	W11056



Package: 174 x 24 x 13,5 cm

ACCESSORIES



Walk gate post
with rivet nut
10x10x220 cm
RAL 7016
anthracite
W5022



Bare post
10x10x220 cm
RAL 7016
anthracite
W6330





Hinge fastening
for concrete
mounting
80x80 mm
S5203

* When mounting to concrete posts, buy 2 pcs. of Hinge fastening for concrete mounting

DOUBLE-LEAF GATES

DOUBLE-LEAF GATE 4 M

Product width:	400 cm
Clear width of steel posts:	404 cm
Clear width of concrete posts*:	408 cm
Height:	150 cm
Rail profile:	80x20 mm
Number of rails:	2x12 pcs.
Profil ramy:	40x30, 40x40, 25x25 mm
Manufacturer's index:	W11051
Manufacturer's index for powered option:	W11050

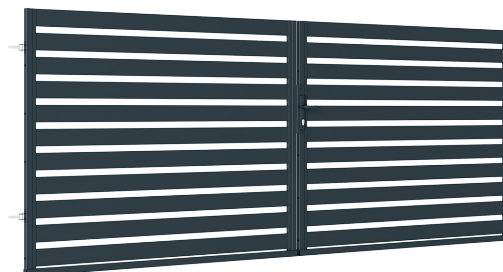

Package no. 1 & 2: 198 x 36 x 13,5 cm
Powered option: + 1 package

ACCESSORIES




Gate post
with rivet nut
10x10x220 cm
RAL 7016
anthracite

W5022



Hinge fastening
for concrete
mounting
80x80 mm

S5203
44678886



Universal gate
bottom lock

S0198
44262526



Opening
limiter
(recommended)

S1975
82502756

* When mounting to concrete posts, buy 4 pcs. of Hinge fastening for concrete mounting

DOUBLE-LEAF GATE OPERATOR

SPECIFICATION

Opening time	ca. 18 sec.*
Max gate weight	up to 300 kg
Max leaf length	up to 5 m
Supply voltage	230 V 50/60Hz
Input current to line 230V max	1 A
Max motor power	60W + 60W
Motor type	24 V
Max motor current	2,5A + 2,5 A
Thrust	1500N
Continuous work time	20 min.
Lubrication	permanent grease
Sound pressure	LpA-70 dB
Protection level	IP44
Operating temperature	-20 to +70 °C
Motor size	750x85x102 mm
Max no. of connected remotes	750
Opening on power failure	yes
Built-in antenna	yes
Actuator weight	4 kg

* opening time may vary, depending on the parameters of the gate



SET INCLUDES: 2x actuator, control panel, 2x four-channel remote control, mounting hardware, installation and use guides.

ACCESSORIES



Photocells Visio,
Easy Way (2 szt.)

S9598



Warning light
Splendor, Easy Way

S9599



Keypad Wi,
Easy Way

S9600




4-channel remote
control, Easy Way

S1975

SLIDING GATE


LEFT SLIDING GATE 4M

Product width:	550 cm
Clear width of steel posts:	400 cm
Clear width of concrete posts*:	400 cm
Height:	149 cm
Rail profile:	80x20 mm
Number of rails:	2x12 pcs.
Frame profile:	40x 40, 40x20, 60x40, 40x30, 25x25 mm
Manufacturer's index:	W11054
Manufacturer's index for powered option:	W11052

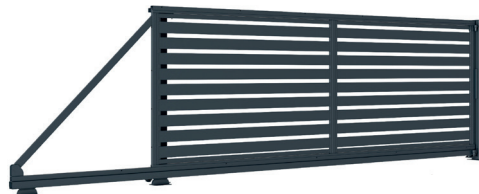

RIGHT SLIDING GATE 4M

Product width:	550 cm
Clear width of steel posts:	400 cm
Clear width of concrete posts*:	400 cm
Height:	149 cm
Rail profile:	80x20 mm
Number of rails:	2x12 pcs.
Frame profile:	40x 40, 40x20, 60x40, 40x30, 25x25 mm
Manufacturer's index:	W11055
Manufacturer's index for powered option:	W11052

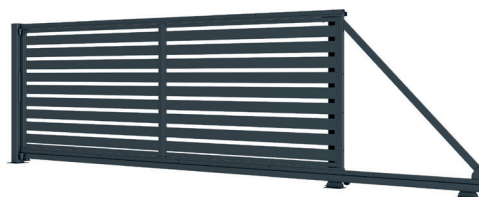

Package no. 1: 231 x 8,5 x 13,5 cm
Package no. 2: 340 x 7,5 x 13 cm
Package no. 3: 206 x 26,5 x 10,5 cm

Package no.: 206 x 21,5 x 10,5 cm
Package no.: 200 x 24 x 11 cm
Powered option: + 1 package

SET INCLUDES: Receiving post 10x10 cm with post support, support post 7x7 cm with post support, castor, wheels 2 pcs., roll for 7x7 cm rail.

ACCESSORIES



Opening
limiter
(recommended)

S1975
82502756

EASY WAY 110 (powered by Home Life)



SLIDING GATE OPERATOR

SPECIFICATION

Opening time	ca. 24 sec.*
Max gate weight	up to 400 kg
Motor type	24V
Supply voltage	230 V 50/60Hz
Max motor power	180W
Max motor current	6A
Thrust	300N
Max starting torque	15Nm
Continuous work time	20 min.
Lubrication	permanent gre- ase
Limit switches	Magnetic-Hall
Sound pressure	LpA-70 dB
Motor size	355x170x300 mm
Actuator weight	7 kg
Protection level	IP55
Operating temperature	-20 to +70 °C
Opening on power failure	yes
Built-in antenna	yes

* opening time may vary, depending on the parameters of the gate



SET INCLUDES: control panel, gearmotor, anchor plate, 2x four-channel remote control, mounting hardware, installation and use guides.

ACCESSORIES



Photocells Visio,
Easy Way (2 szt.)

S9598



Warning light
Splendor, Easy Way

S9599



Keypad Wi,
Easy Way

S9600



4-channel remote
control, Easy Way

S1975



OGRODZENIA OD PROFESJONALISTÓW

Deptak 17

04-956 Warsaw

Phone number: (+48) 22 872 00 91-93

Fax number: (+48) 22 612 68 60

E-mail address: sekretariat@polargos.pl

WWW.POLARGOS.PL